



WIRING DIAGRAM



FACE VIEW

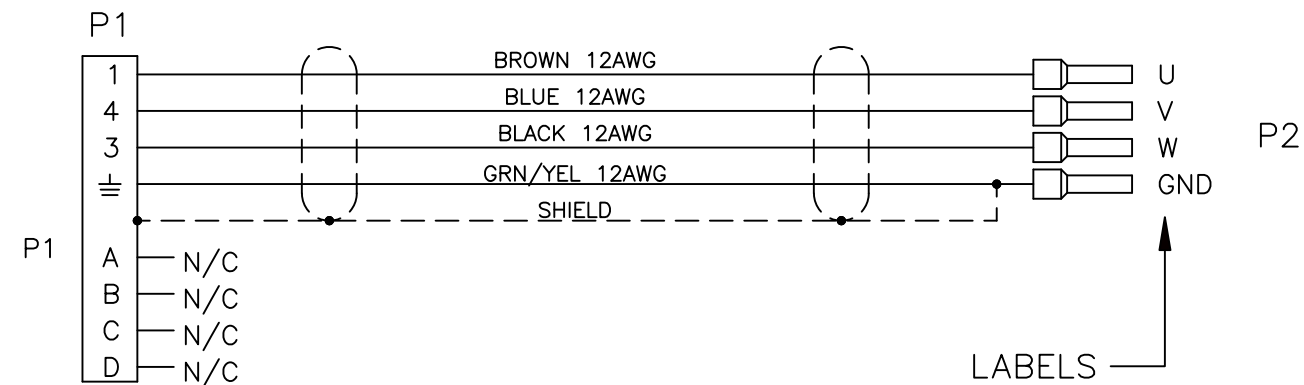

N/C DENOTES NO CONNECTION

NOTES: VP-508DEAN-\*\*-\*

- 1) Cable Jacket Material – TPE
  - \* Outside Diameter –  $\phi$ 11.7mm Ref
  - \* Bend radius – 117mm
  - \* Static flex Rating – Not Rated
  - \* Dynamic Flex Rating – Not Rated
  - \* Temperature Rating – 105C
  - \* Voltage Rating – 600V
- 2) Assembly Weight – See table
- 3) This assembly is RoHS Compliant

VP-508DEAN-01-0	0.292KG
VP-508DEAN-03-0	0.874KG
VP-508DEAN-06-0	1.750KG
VP-508DEAN-09-0	2.622KG
VP-508DEAN-12-0	3.496KG

KOLLMORGEN  
AKD DRIVE  
AKM MOTOR EURO STYLE  
24 AMP POWER CABLE