
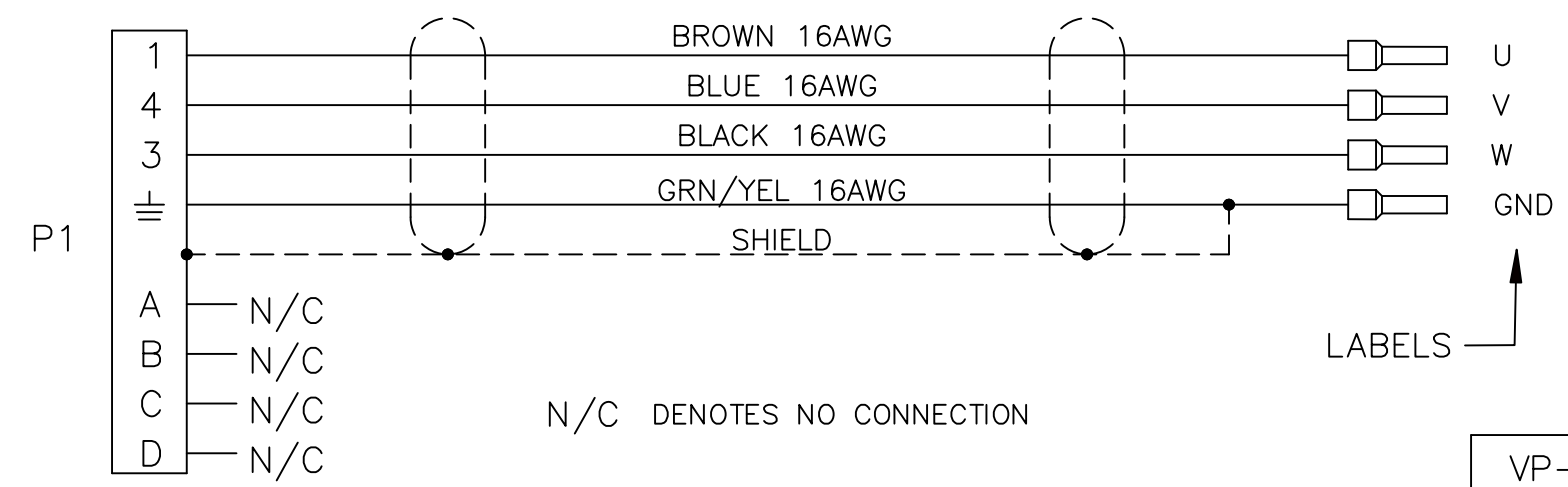


TOLERANCE	
UP TO 2.99M	= +10cm, -0"
3M TO 8.99M	= +15cm, -0"
9M TO 14.99M	= +30cm, -0"
15M TO 29.99M	= +45cm, -0"
30M AND OVER	= +60cm, -0"

WIRING DIAGRAM

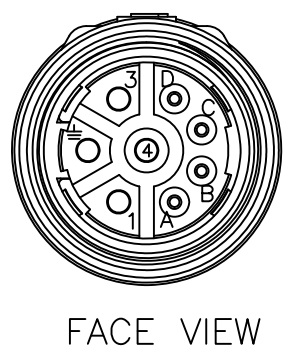

N/C DENOTES NO CONNECTION

VP-507BEAN-01	0.258KG
VP-507BEAN-03	0.536KG
VP-507BEAN-06	0.955KG
VP-507BEAN-09	1.372KG
VP-507BEAN-12	1.789KG

NOTES: VP-507BEAN-**

- 1) Cable Jacket Material – TPE
 - * Outside Diameter – $\phi 9.40 \pm 0.25\text{mm}$
 - * Bend radius – 94mm
 - * Static flex Rating – Not Rated
 - * Dynamic Flex Rating – Not Rated
 - * Temperature Rating – 105C
 - * Voltage Rating – 600V
- 2) Assembly Weight – See table
- 3) This assembly is RoHS compliant

KOLLMORGEN
AKD DRIVE
AKM MOTOR EURO STYLE
POWER CABLE, 6 AMP