



FACE VIEW

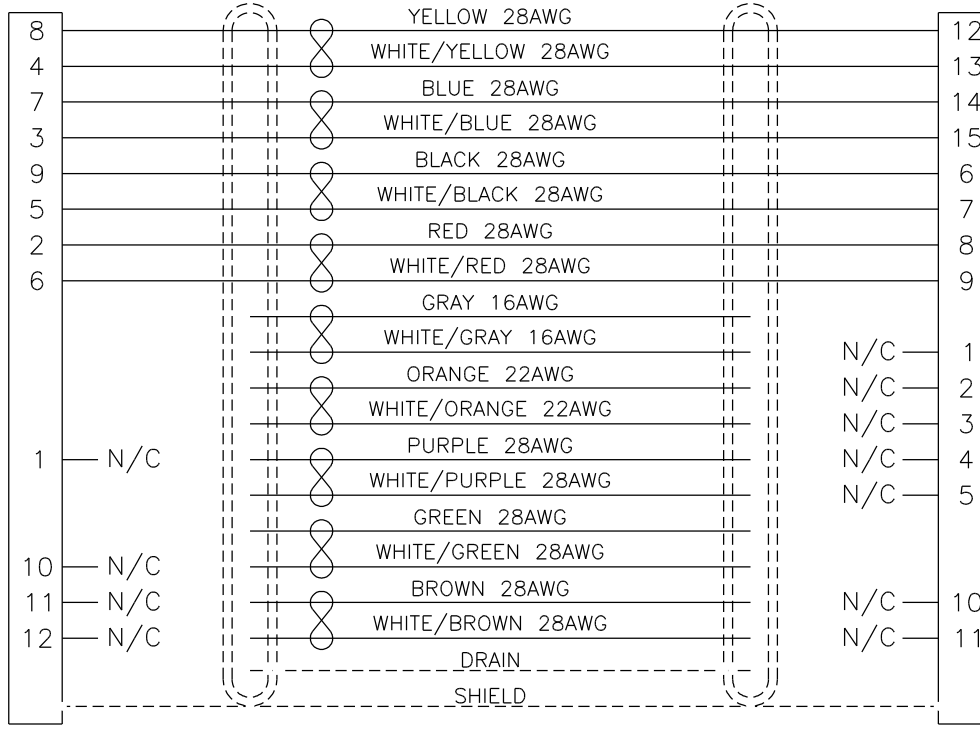

FACE VIEW

PIN 1

VF-RA2474N-01-0	0.273KG
VF-RA2474N-03-0	0.551KG
VF-RA2474N-06-0	0.968KG
VF-RA2474N-09-0	1.385KG
VF-RA2474N-12-0	1.793KG
ASSEMBLY WEIGHT	

VF-RA2474N-**

- 1) Cable Specifications:
 Jacket Material: TPE
 Outside Diameter: $\varnothing 9.65\text{mm} \pm 0.35\text{mm}$
 Bend Radius (min): 96.5mm
 Static Flex Rating: Not Rated
 Dynamic Flex Rating: Not Rated
 Temperature Rating: 105°C
 Voltage Rating: 300V
 AWM Style: UL20327
- 2) Assembly Weight – SEE TABLE
- 3) This assembly is RoHS COMPLIANT

 = TWISTED PAIR

N/C DENOTES NO CONNECTION

CONNECTOR BACKSHELL SHIELDED 360° (BOTH ENDS)

DANAHER MOTION
 S200 DRIVE
 AKM MOTOR EURO STYLE
 FEEDBACK RESOLVER CABLE