



### B Series Features

- 17, 23, 34 and 42 frame brushless servo motors
- Optimized for use with IDC's B8000 servo controls
- High Torque-to-inertia ratio for quick acceleration
- Rugged MS-style connectors, 12-ft quick-disconnect cables included

### BN Series Features

- 23 and 34 frame brushless servo motors
- True NEMA dimensions (including motor shafts)
- Smooth operation/low cogging
- 12-ft jacketed cables included

### Brushless Motor Comparison

	Continuous Stall Torque oz-in [N-m]	Peak Torque oz-in [N-m]	Max Speed @ 115 VAC rps [rpm]	Max Speed @ 230 VAC rps [rpm]	For Complete Motor Specs, see:
B12	24 [0.17]	63 [0.44]	100 [6000]	NA	H-53
B23	160 [1.13]	580 [4.09]	63 [3780]	100 [6000]	H-54
B23H	160 [1.13]	480 [3.39]	76 [4560]	100 [6000]	H-55
B32	493 [3.48]	853 [6.02]	37 [2220]	74 [4440]	H-56
B33	624 [4.41]	1792 [12.65]	20 [1200]	41 [2460]	H-57
B40	488 [3.45]	1328 [9.38]	27 [1620]	55 [3300]	H-58
B41	930 [6.57]	1616 [11.41]	20 [1200]	39 [2340]	H-59
B42	1328 [9.38]	4032 [28.47]	9 [540]	18 [1080]	H-60
BN21	22 [0.15]	70 [0.49]	100 [6000]	N/A	H-49
BN23	51 [0.36]	170 [1.2]	100 [6000]	N/A	H-50
BN31	108 [0.76]	320 [2.26]	79 [4750]	N/A	H-51
BN32	191 [1.35]	560 [3.96]	61 [3700]	N/A	H-52



## How To Order

Motor Models	Description	Options	Description
<input type="text"/>	—	<input type="text"/>	
B12	B12 motor w/ 12-ft quick-disconnect cable	-B	24 VDC motor brake
B23	B23 motor w/ 12-ft quick-disconnect cable	-C25	25-foot cable
B23H	B23H motor w/ 12-ft quick-disconnect cable	-C50	50-foot cable
B32	B32 motor w/ 12-ft quick-disconnect cable	-C100	100-foot cable
B33	B33 motor w/ 12-ft quick-disconnect cable		
B40	B40 motor w/ 12-ft quick-disconnect cable		
B41	B41 motor w/ 12-ft quick-disconnect cable		
B42	B42 motor w/ 12-ft quick-disconnect cable		
Motor Models	Description		
<input type="text"/>			
BN21	BN21 motor with 12-foot jacketed cable		<b>Note:</b> Currently, no options are available for the BN motors.
BN23	BN23 motor with 12-foot jacketed cable		
BN31	BN31 motor with 12-foot jacketed cable		
BN32	BN32 motor with 12-foot jacketed cable		





To confirm your selection, review the checklist on page H-6.





- Performance using B8000 Series controls
- IDC recommends at least a 10% torque safety margin and taking winding tolerances into account when applying servo motors.
- See How to Order on page H-48.
- Brake option adds 1.5 in [38 mm] to motor length

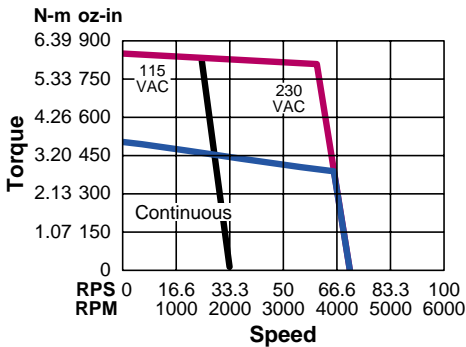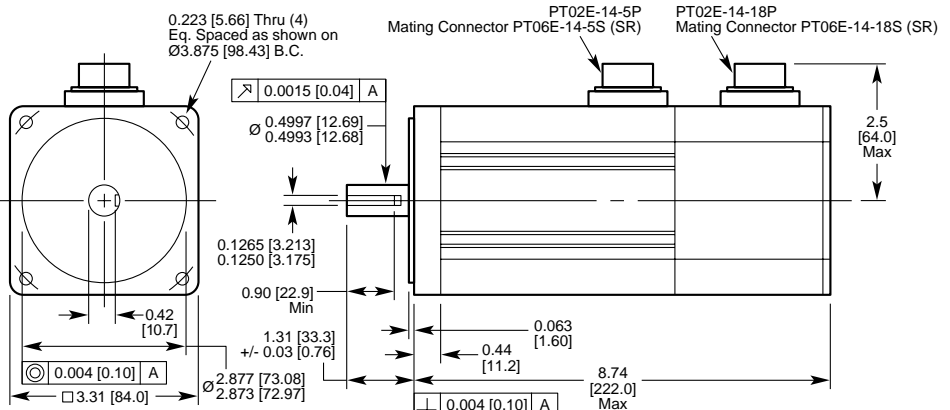

- Continuous duty region (230/115 VAC only) [max RMS torque over any 10-minute interval]
- Intermittent duty region
- 115 VAC speed limit

### System Ratings with B8000 Controls

#### Torque

Continuous Stall Torque oz-in [N-m]	493 [3.48]
Peak oz-in [N-m]	853 [6.02]
Peak Shaft Power @ 230 VAC HP [W]	2.9 [2208]

#### Torque Sensitivity

$K_{T(p-p)}$ oz-in/A [N-m/A]*	98.5 [0.695]
Back EMF, KV $V_{p-p}/kRPM^*$	72.8

\* ±10% tolerance


#### Motor Data

Rotor Inertia oz-in-sec <sup>2</sup> [kg-m] <sup>2</sup>	0.016 [1.14 x 10 <sup>-4</sup> ]
Weight lb [kg]	12.0 [5.4]
Axial Shaft Loading lb [kg]	25 [11.3]
Radial shaft loading lb [kg] @ 1 in [25 mm]	40 [18.1]
Incremental encoder	2000 line, 8000 counts/rev

### Applying Gearmotors\*


- See page I-1 for IDC gearmotor information
- See page I-1 for how to determine gearmotor performance
- The servo drive should be current limited if the continuous or intermittent torque of the motor exceeds the gearhead torque ratings.

### Performance Planetary Gearmotors



Gear Ratio in [mm]	In-line (L)	Right-angle (A x B)
3 to 10	12.93 [328.4]	5.20 x 17.90 [132.1 x 454.7]
16 to 100	14.05 [356.9]	5.20 x 19.03 [132.1 x 483.4]
160 to 700	15.28 [388.1]	Above 100:1, not available

### Value Planetary Gearmotors



Gear Ratio in [mm]	In-line (L)	Right-angle (A x B)
3 to 10	13.3 [337.8]	5.20 x 18.27 [132.1 x 464.1]
16 to 100	14.56 [369.8]	5.20 x 19.54 [132.1 x 496.3]