
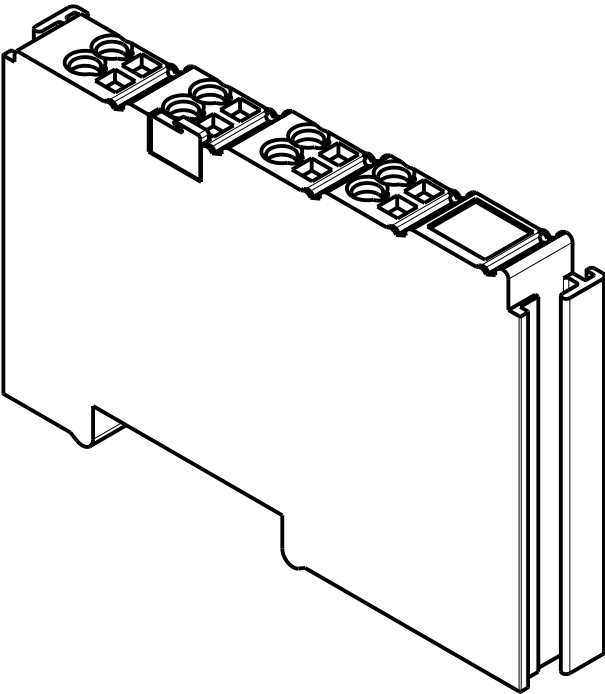
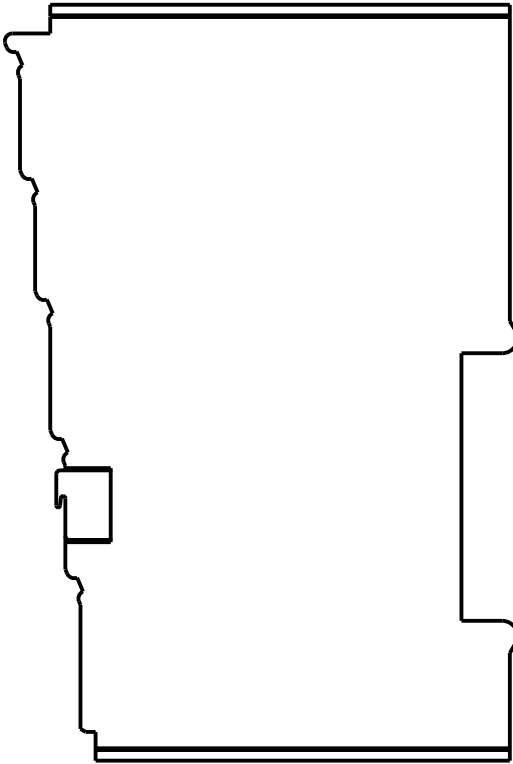


DWG. NO.
AKT2G-AN-240-000

REV
-

REVISION HISTORY

| REV | ECO NUMBER | DESCRIPTION | DATE | APP'D |
|-----|------------|-------------|------|-------|
| | | | | |

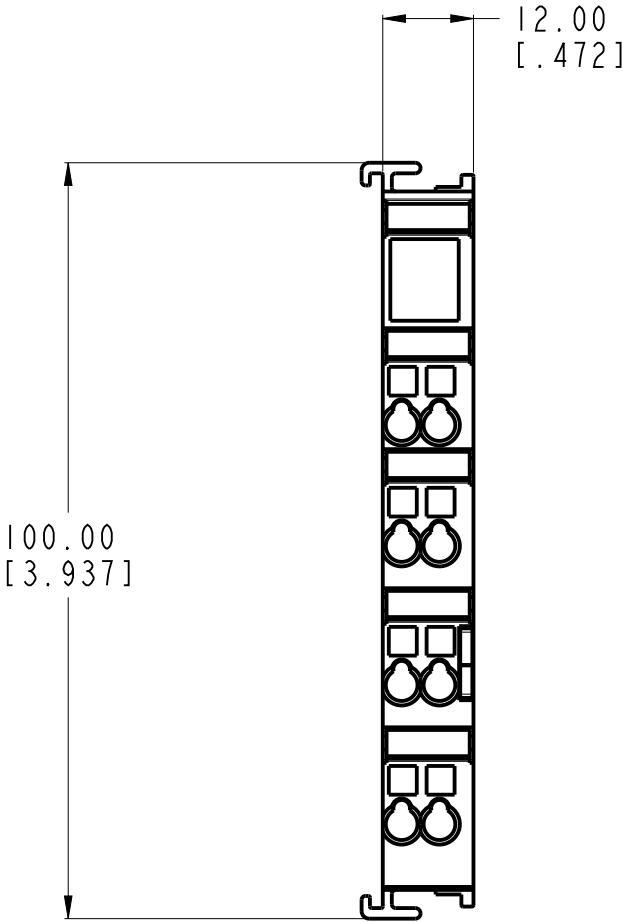


This drawing contains PROPRIETARY information and is the property of KOLLMORGEN. This drawing may not be copied or used without prior written approval of KOLLMORGEN

INTERPRET GEOMETRIC SYMBOLS
PER ASME Y14.5-2009

| | |
|----------------------|------------------|
| Pro/E Model File Rev | - |
| Pro/E Instance Name | AKT2G-AN-240-000 |
| Pro/E Drawing Name | AKT2G-AN-240-000 |
| Pro/E Model Type | PART |

Pro/Engineer Drawing

MILLIMETERS

| | | | | | | | | | | | |
|---|--|---|--|---|--------------------|--|----------------|------------------------------|------------|--|--------------|
| | | UNLESS OTHERWISE SPECIFIED: DIMENSIONS APPLY BEFORE COATINGS REMOVE ALL SHARP BURRS AND BREAK ALL SHARP EDGES | | | | KOLLMORGEN <div>Design Control Location: 201 West Rock Road Radford, Virginia 24141 United States of America</div> | | | | | |
| ▼ | SIGNIFICANT PRODUCT CHARACTERISTIC | MILLIMETER VALUES: ANGULAR TOLERANCE: ±1° X DEC. PLACE: ±.4mm XX DEC. PLACE: ±.13mm | | [INCH] VALUES: ANGULAR TOLERANCE: ±1° XX DEC. PLACE: ±.015" XXX DEC. PLACE: ±.005" | | 2-CHANNEL INPUT TERMINAL PT100 (RTD) FOR RESISTANCE SENSORS, 16 BIT, 2-, 3-WIRE SYSTEM | | | | | |
| ◆ | CRITICAL PRODUCT CHARACTERISTIC | | | | | | | | | | |
| THIRD ANGLE PROJECTION  | | DO NOT SCALE DRAWING USE DIMENSIONS ONLY ALL DIMENSIONS ARE MM [INCH] INCH DIMENSIONS IN BRACKETS [] ARE FOR REFERENCE ONLY | | DRAWN BY: L&T | DATE: May-19-21 | SIZE B | CAGE CODE - | DWG. NO. AKT2G-AN-240-000 | REV - | | |
| | | | | CHECKED BY: AJN | DATE: May-19-21 | APPROVED BY: AJN | | DATE: May-19-21 | SCALE: 1:1 | | SHEET 1 OF 1 |