

B Series Features

- 17, 23, 34 and 42 frame brushless servo motors
- Optimized for use with IDC's B8000 servo controls
- High Torque-to-inertia ratio for quick acceleration
- Rugged MS-style connectors, 12-ft quick-disconnect cables included

BN Series Features

- 23 and 34 frame brushless servo motors
- True NEMA dimensions (including motor shafts)
- Smooth operation/low cogging
- 12-ft jacketed cables included



Brushless Motor Comparison

	Continuous Stall Torque oz-in [N-m]	Peak Torque oz-in [N-m]	Max Speed @ 115 VAC rps [rpm]	Max Speed @ 230 VAC rps [rpm]	For Complete Motor Specs, see:
B12	24 [0.17]	63 [0.44]	100 [6000]	NA	H-53
B23	160 [1.13]	580 [4.09]	63 [3780]	100 [6000]	H-54
B23H	160 [1.13]	480 [3.39]	76 [4560]	100 [6000]	H-55
B32	493 [3.48]	853 [6.02]	37 [2220]	74 [4440]	H-56
B33	624 [4.41]	1792 [12.65]	20 [1200]	41 [2460]	H-57
B40	488 [3.45]	1328 [9.38]	27 [1620]	55 [3300]	H-58
B41	930 [6.57]	1616 [11.41]	20 [1200]	39 [2340]	H-59
B42	1328 [9.38]	4032 [28.47]	9 [540]	18 [1080]	H-60
BN21	22 [0.15]	70 [0.49]	100 [6000]	N/A	H-49
BN23	51 [0.36]	170 [1.2]	100 [6000]	N/A	H-50
BN31	108 [0.76]	320 [2.26]	79 [4750]	N/A	H-51
BN32	191 [1.35]	560 [3.96]	61 [3700]	N/A	H-52



How To Order

Motor Models

Description

Options

Description

B12	B12 motor w/ 12-ft quick-disconnect cable
B23	B23 motor w/ 12-ft quick-disconnect cable
B23H	B23H motor w/ 12-ft quick-disconnect cable
B32	B32 motor w/ 12-ft quick-disconnect cable
B33	B33 motor w/ 12-ft quick-disconnect cable
B40	B40 motor w/ 12-ft quick-disconnect cable
B41	B41 motor w/ 12-ft quick-disconnect cable
B42	B42 motor w/ 12-ft quick-disconnect cable

-B	24 VDC motor brake
-C25	25-foot cable
-C50	50-foot cable
-C100	100-foot cable

Motor Models

Description

BN21	BN21 motor with 12-foot jacketed cable
BN23	BN23 motor with 12-foot jacketed cable
BN31	BN31 motor with 12-foot jacketed cable
BN32	BN32 motor with 12-foot jacketed cable

Note: Currently, no options are available for the BN motors.





To confirm your selection,
review the checklist on page H-6.





Performance

- Performance using B8000 Series controls
- IDC recommends at least a 10% torque safety margin and taking winding tolerances into account when applying servo motors.
- See How to Order on page H-48.
- Brake option adds 2.0 in [51 mm] to motor length

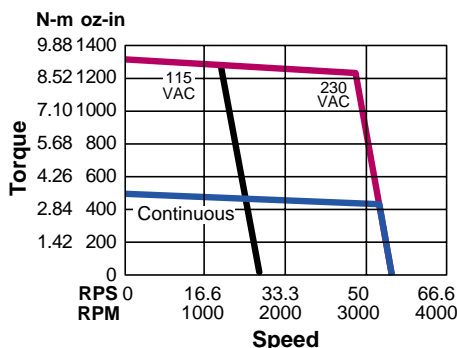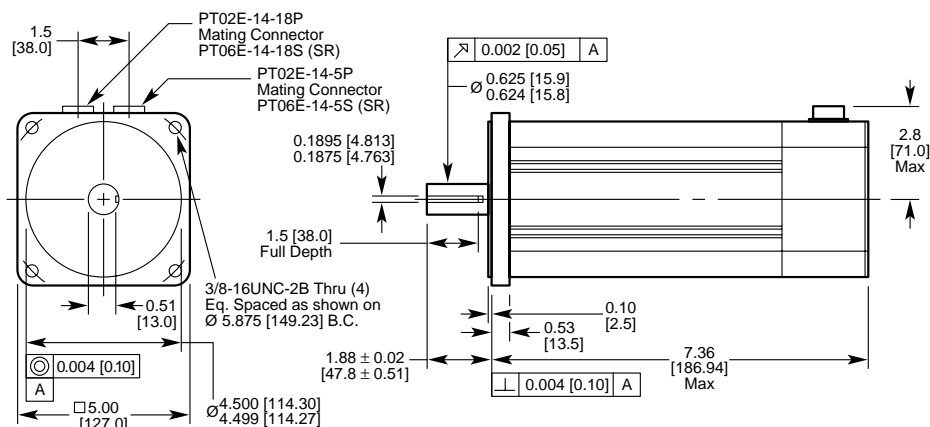

- Continuous duty region (230/115 VAC) [max RMS torque over any 10-minute interval]
- Intermittent duty region
- 115 VAC speed limit

System Ratings with B8000 Controls

Torque

Continuous Stall Torque oz-in [N-m] 488 [3.45]

Peak oz-in [N-m] 1328 [9.38]

Peak Shaft Power @ 230 VAC HP [W] 2.6 [1970]

Torque Sensitivity

$K_{T(p-p)}$ oz-in/A [N-m/A]* 132.8 [0.938]

Back EMF, KV $V_{p-p}/krpm^*$ 98.2

* ±10% tolerance

Motor Data

Rotor Inertia oz-in-sec² [kg-m]² 0.024 [1.69 x 10⁻⁴]

Weight lb [kg] 12.6 [5.7]

Axial Shaft Loading lb [kg] 50 [22.7]

Radial shaft loading lb [kg] @ 1 in [25 mm] 100 [45.4]

Incremental encoder 2000 line, 8000 counts/rev

Applying Gearmotors*

- See page I-1 for IDC gearmotor information
- See page I-1 for how to determine gearmotor performance
- The servo drive should be current limited if the continuous or intermittent torque of the motor exceeds the gearhead torque ratings.

Performance Planetary Gearmotors

	In-line	Right-angle
Gear Ratio in [mm]	L	A x B
3 to 10	12.52 [318.0]	5.95 x 18.75 [151.1 x 476.3]
16 to 100	14.15 [359.4]	5.95 x 20.38 [151.1 x 517.7]
160 to 700	15.30 [388.6]	Above 100:1, not available

Value Planetary Gearmotors

	In-line	Right-angle
Gear Ratio in [mm]	L	A x B
3 to 10	12.56 [319.0]	5.95 x 19.21 [151.1 x 487.9]
16 to 100	14.16 [359.7]	5.95 x 20.81 [151.1 x 528.6]