



NOTES:  
1.PERFORMANCE CHARACTERISTICS: REFER TO KOLLMORGEN CATALOG  
2.SHAFT SEAL: NONE  
3.BRAKE: INSTALLED, REFER TO KOLLMORGEN CATALOG

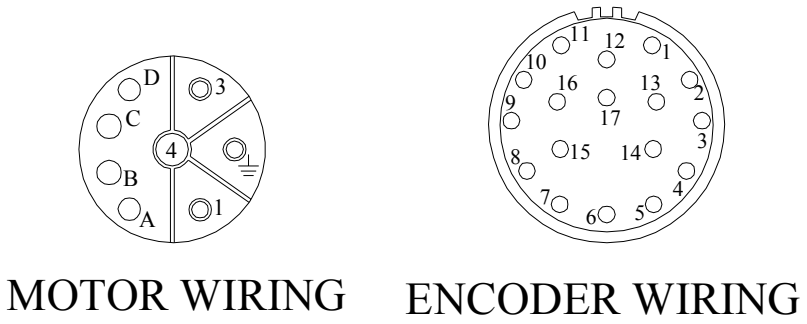

REVISION HISTORY				
REV	ECD	NUMBER	DESCRIPTION	DATE APP'D

NO	Signal	Color
1	U	Red
≡	GND	Green
3	W	Black
4	V	White
A	BRAKE 24V	thin white
B	BRAKE 0V	thin white
C		
D		

NO	SIGNAL	COLOR
1	B+	green
2	B-	g/blk
3	A-	blue
4	A+	blue/blk
5	Z+	yellow
6	Z-	y/blk
7	Gnd	black
8		
9		
10	+5V	red
11		
12		
13		
14		
15	Hall U+	brown
16	Hall V+	gray
17	Hall W+	white

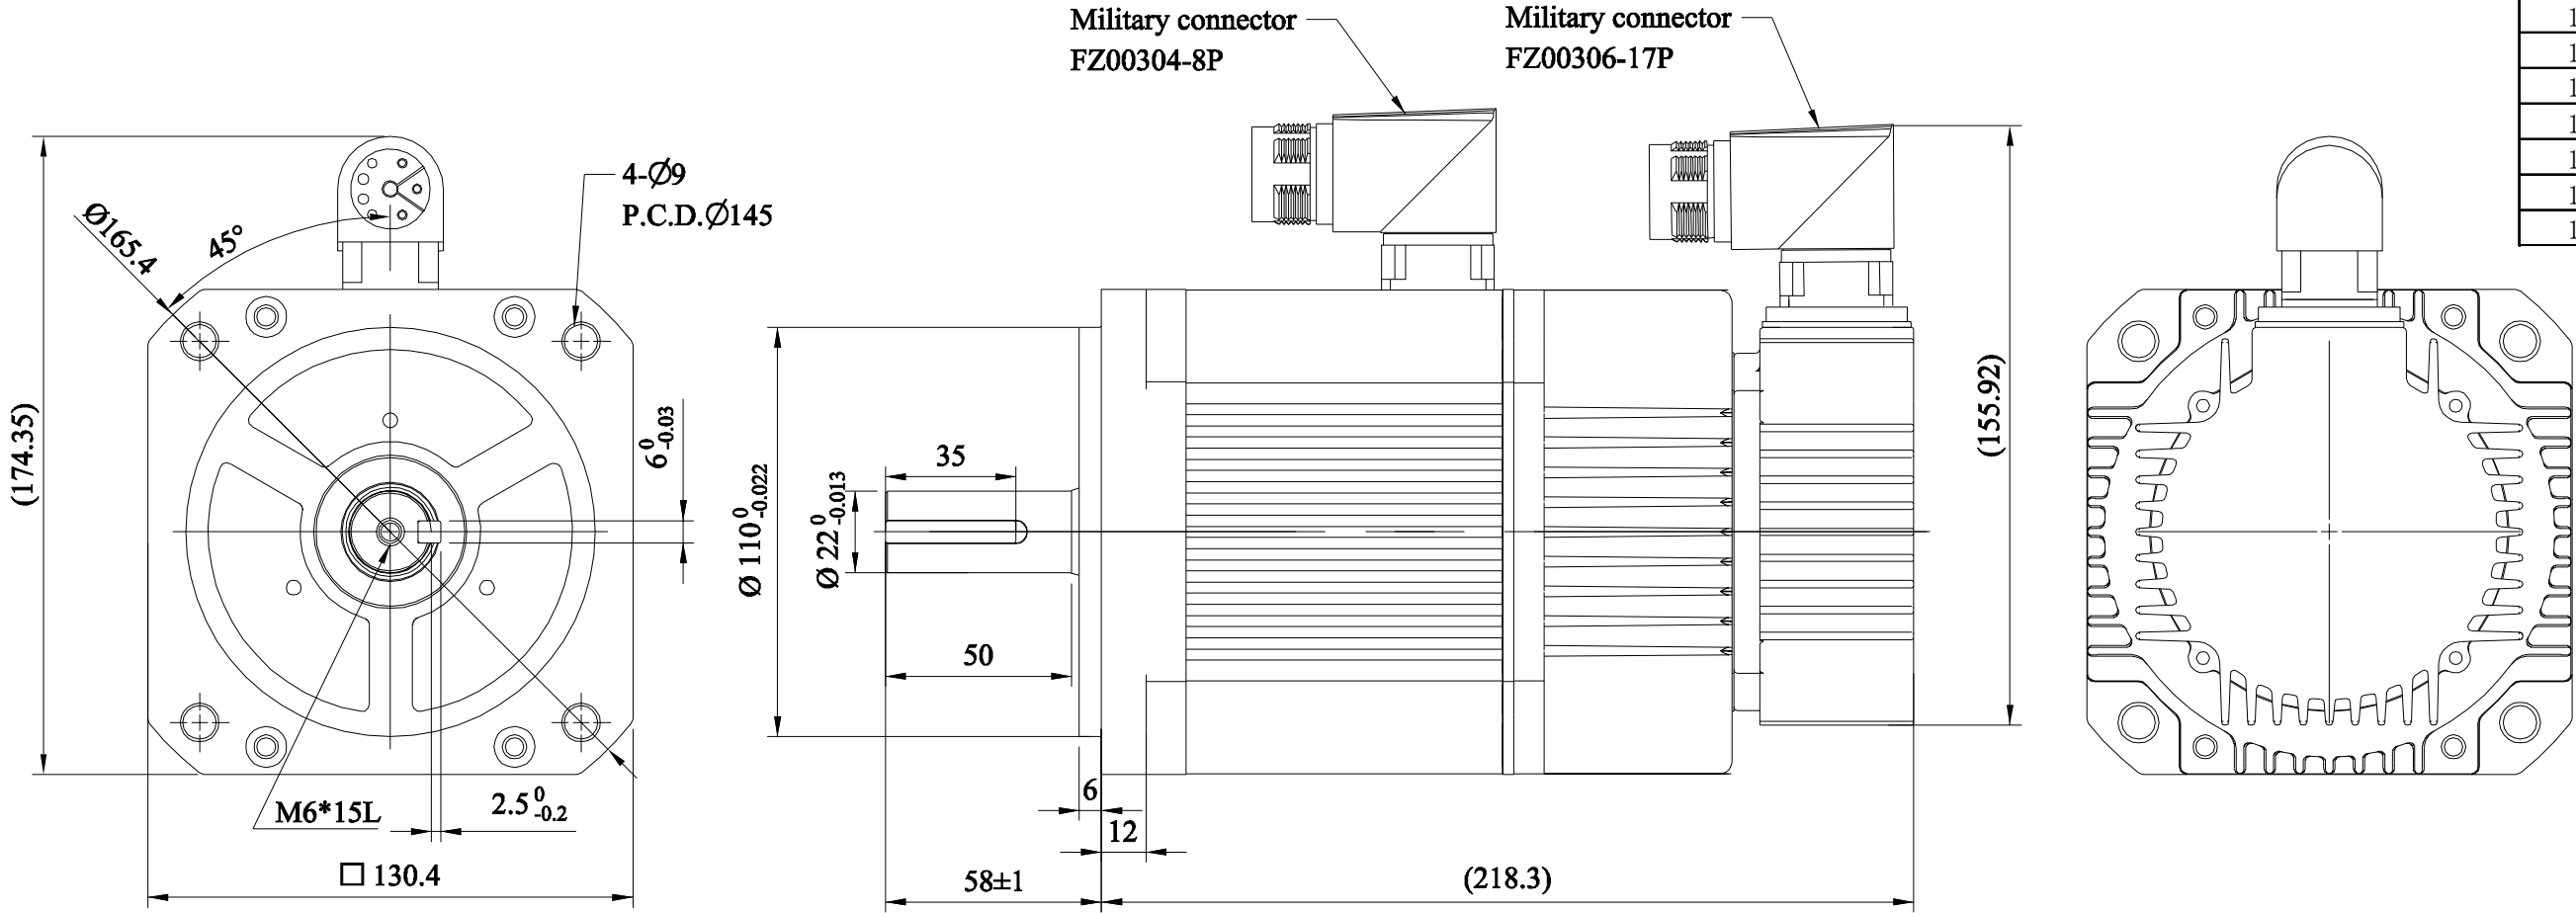

This drawing contains PROPRIETARY information and is the property of KOLLMORGEN. This drawing may not be copied or used without prior written approval of KOLLMORGEN

INTERPRET GEOMETRIC SYMBOLS  
PER ANSI Y14.5M-1982

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS APPLY BEFORE COATINGS  
REMOVE ALL SHARP BURRS AND BREAK ALL SHARP EDGES

MILLIMETER VALUES:  
WHOLE NUMBER X:±0.5  
ONE PLACE X.X:±0.2  
TWO PLACE X.XX:±0.05  
ANGLES X°:±30'

[INCH] VALUES:  
WHOLE NUMBER X:±0.0197  
ONE PLACE X.X:±0.00787  
TWO PLACE X.XX:±0.00197  
ANGLES X°:±30'

DO NOT SCALE DRAWING  
USE DIMENSIONS ONLY  
ALL DIMENSIONS ARE MM [INCH]  
INCH DIMENSIONS IN  
BRACKETS [ ] ARE FOR  
REFERENCE ONLY

DRAWN BY:  
LZQ

CHECKED BY:  
SL

APPROVED BY:  
JK

DATE:  
July 17,  
2015

DATE:  
July 17,  
2015

DATE:  
July 17,  
2015

KOLLMORGEN

MOTOR, AC SERVO  
CKM15A-AKC22-00

Design Control Location:  
28 Weiwu Road  
Xiqing District, 300385  
Tianjin, China

SIZE B  
CAGE CODE  
—

DWG. NO.  
CKM15A-AKC22-00

REV  
—

SCALE  
1:5

SHEET 1 OF 1